


LHR series

Aluminum Electrolytic Capacitors

105 2000hrs Radial type

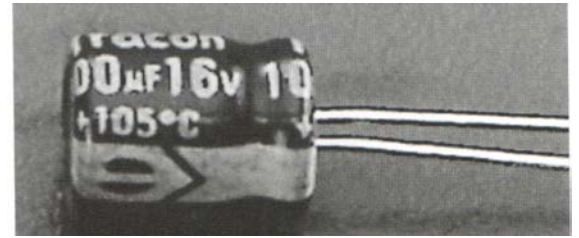

◆ Features

- » Standard series for general purposes.
- » Used in communication equipments, switching power supply
- » Safety vent construction design

◆ Part Number

LHR	475	M	500	R	B	-	0611
Series	Capacitance	Tolerance	Voltage	Lead form	package		Size
LHR	0.1uF=104	20%=M	10V=100	Radial=R	Bulk=B		5x11=0511
	4.7uF=475		50V=500	Axial=A	Taping=T		6x11=0611
	47uF=476		100V=101				8X11=0811
							10x12=1012

◆ Specification

Test Item	Performance Characteristics																																										
Operating Temperature Range	-40 to +105 °C	-25 to +105 °C																																									
Rated voltage Range	6.3 to 100 VDC	160 to 450 VDC																																									
Capacitance Range	0.1 to 15000uF	0.47 to 470uF																																									
Capacitance Tolerance	±20%(120Hz, +20 °C)																																										
Leakage Current (+20 °C, max.)	$I \leq$ whichever is greater measured with rated working voltage applied.	$I \leq 0.03 C$ with rated working voltage applied..																																									
Dissipation Factor (tanδ)	<table border="1"> <thead> <tr> <th>Working Voltage (VDC)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>D.F.(%)max</td> <td>23</td> <td>20</td> <td>16</td> <td>14</td> <td>12</td> <td>10</td> <td>10</td> <td>10</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Working Voltage (VDC)</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td>D.F.(%)max</td> <td>15</td> <td>15</td> <td>16</td> <td>20</td> <td>20</td> <td>20</td> </tr> </tbody> </table> <p>For Capacitance > 1000uF , add 2% per another 1000uF (+20 °C, at 120Hz)</p>		Working Voltage (VDC)	6.3	10	16	25	35	50	63	100	D.F.(%)max	23	20	16	14	12	10	10	10	Working Voltage (VDC)	160	200	250	350	400	450	D.F.(%)max	15	15	16	20	20	20									
Working Voltage (VDC)	6.3	10	16	25	35	50	63	100																																			
D.F.(%)max	23	20	16	14	12	10	10	10																																			
Working Voltage (VDC)	160	200	250	350	400	450																																					
D.F.(%)max	15	15	16	20	20	20																																					
Low Temperature Characteristics (120Hz)	<table border="1"> <thead> <tr> <th>Working Voltage (VDC)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>Z-25 °C</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40 °C</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Working Voltage (VDC)</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td>Z-25 °C</td> <td>3</td> <td>3</td> <td>3</td> <td>5</td> <td>6</td> <td>15</td> </tr> </tbody> </table> <p>For Capacitance Value 1000uF , add 0.5 per another 1000uF for -25 °C/+20°C add 1 per another 1000uF for -40 °C/+20°C</p>		Working Voltage (VDC)	6.3	10	16	25	35	50	63	100	Z-25 °C	4	3	2	2	2	2	2	2	Z-40 °C	8	6	4	3	3	3	3	3	Working Voltage (VDC)	160	200	250	350	400	450	Z-25 °C	3	3	3	5	6	15
Working Voltage (VDC)	6.3	10	16	25	35	50	63	100																																			
Z-25 °C	4	3	2	2	2	2	2	2																																			
Z-40 °C	8	6	4	3	3	3	3	3																																			
Working Voltage (VDC)	160	200	250	350	400	450																																					
Z-25 °C	3	3	3	5	6	15																																					
Load Life	<p>Test conditions Duration time : 2000Hrs Ambient temperature:+105 °C Applied voltage: Rated DC working voltage After test requirements:at+20 °C After test requirements: Dissipation Factor: $\leq \pm 20\%$ of the initial measured value Leakage current: $\leq 200\%$ of the initial specified value</p>																																										
Shelf Life	<p>Test conditions Duration time :500Hrs Ambient temperature:+105 °C Applied voltage: None After test requirements at +20 °C: Some limits as Load life. Pre-treatment for measurements shall be conducted after application of DC working voltage for 30 minutes.</p>																																										


Multiplier for Ripple Current VS, Frequency

CAP (uF) \ HZ		50(60)	120	400	1K	10K	50-100K
Multiplier	CAP ≤ 10	0.8	1.0	1.30	1.45	1.65	1.70
	10<CAP	0.8	1.0	1.23	1.36	1.48	1.53
	100<CAP	0.8	1.0	1.16	1.25	1.35	1.38
	1000<CAP	0.8	1.0	1.11	1.18	1.25	1.28

Multiplier for Ripple Current VS, Temperature

Temperature (°C	45	60	70	85	105
Multiplier	2.10	1.90	1.65	1.40	1.00

Diagram of Dimensions: (Unit: mm)

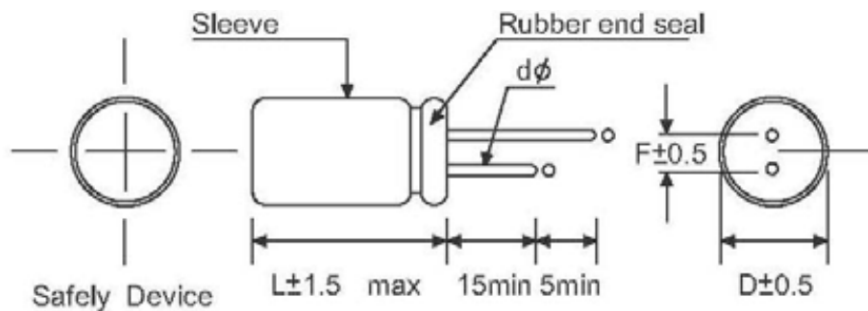

D Ø	5	6.3	8	10	13	16	18	22	25
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10	12
d Ø	0.5			0.6			0.8		1.0
L	L < 20 : ± 1.5 mm, L ≥ 20 : $+2.0$ mm								

◆ Standard Products Table

Ø D x L (mm)

WV uF	6.3		10		16		25		35	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
1	-	-	-	-	5x11	9	5x11	9	5x11	11
4.7	-	-	-	-	-	-	5x11	27	5x11	29
6.8	-	-	-	-	-	-	5x11	35	5x11	38
10	-	-	-	-	5x11	38	5x11	40	5x11	42
22	-	-	5x11	50	5x11	56	5x11	60	5x11	62
33	5x11	56	5x11	60	5x11	65	5x11	70	5x11	78
47	5x11	68	5x11	72	5x11	100	5x11	105	5x11	110
68	5x11	77	5x11	82	5x11	105	6.3x11	120	6.3x11	140
100	5x11	98	5x11	110	5x11	115	5x11	135	6.3x11	165
					6.3x11	135	6.3x11	150	8x11	180
					8x11	165	8x11	175	8x14	190
220	5x11	160	5x11	170	6.3x11	220	6x11	230	8x11	300
	6.3x11	180	6.3x11	180	8x11	230	8x11	240	8x14	325
							10x12	285	8x16	330
									8x20	350
									10x12	330
330	6.3x11	200	6.3x11	260	8x11	300	8x11	350	10x12	410
			8x11	280			8x14	352	10x15	420
							10x12	355		
470	6.3x11	280	6.3x11	300	8x11	380	8x14	415	8x20	500
	8x11	310	8x11	315	8x14	390	10x12	445	10x12	460
					10x12	400	10x15	450	10x15	470
							10x20	465	10x16	460
									10x17	480
									10x20	520
560	8x11	320	8x11	330	10x12	410	10x15	460	10x17	540
									13x14	500
680	8x11	360	8x11	400	8x14	470	10x12	450	10x20	550
			8x14	410	10x12	480	10x15	520	10x20	550
			10x12	420			10x17	600	13x21	750
820	8x11	390	10x12	480	10x15	550	10x15	640	10x20	760
1000	8x11	420	8x11	490	8x16	570			10x20	810
	10x12	460	8x14	500	8x20	595			10x25	870
			8x16	530	10x12	580	10x15	740	10x25	870
			10x12	530	10x13	590	10x17	800	13x14	850
			10x15	530	10x15	600	10x20	680	13x16	860
			10x15	580	10x16	560	13x16	850	13x20	810
					10x17	630	13x21	900	13x26	910
					10x20	640			16x16	910
1500	10x15	620	10x17	770	10x20	640	13x20	810	13x26	970
2200	10x17	780	10x17	870	10x20	980	10x25	1180	13x26	1260
	10x20	800	10x20	900	13x16	980	13x21	1210	13x26	1260
					13x20	920	13x25	1090	16x21	1290
					13x26	1060	16x16	1270	16x26	1300
							16x26	1290	16x31	1400
2700	10x20	850	13x21	920	13x21	1100	16x26	1330	18x16	1280
									16x31	1500
3300	10x20	970	10x25	1110	13x21	1220	16x26	1480	16x31	1620
	13x21	1010	13x21	1160	13x26	1240	16x31	1540	16x36	1680
					16x16	1220	18x17	1450	18x36	1720
4700	10x25	1160	13x21	1360	13x26	1450				
	13x21	1200	13x26	1380	16x26	1620	16x31	1800	18x36	1900
					18x17	1560				
5600	13x26	1320	16x26	1510	16x31	1720				
					18x19	1660	16x36	1890	18x36	2000
6800	16x26	1470	16x26	1680	16x31	1880	18x36	2040	18x41	2090
			16x31	1800						
8200	16x26	1520	16x31	1840	16x36	1950	18x36	2090	22x42	2180
10000	16x26	1690	16x36	1900	18x36	2060	18x41	2160	18x40	2200
	16x31	1740	18x36	1980	18x41	2080	22x42	2200	25x44	2300
15000	16x36	2080	18x36	2230	22x40	2300	22x42	2500	-	-
	18x36	2190								

Ripple Current(mA,rms)at105 °C120Hz

∅ D x L (mm)

WV uF	50		63		100		160		200	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1	5x11	1.3	5x11	1.3	5x11	1.3	-	-	-	-
0.22	5x11	2.9	5x11	2.9	5x11	2.9	-	-	-	-
0.33	5x11	4.2	5x11	4.2	5x11	4.2	-	-	-	-
0.47	5x11	8	5x11	8	5x11	8	5x11	12	5x11	12
1	5x11	14	5x11	14	5x11	15	5x11	17	6.3x11	17
2.2	5x11	20	5x11	21	5x11	22	6.3x11	26	6.3x11	33
3.3	5x11	26	5x11	28	5x11	30	6.3x11	32	6.3x11	43
4.7	5x11	32	5x11	34	5x11	36	6.3x11	36	8x11	51
6.8	5x11	40	5x11	42	6.3x11	47	8x11	56	10x12	63
10	5x11	50	5x11	51	6.3x11	60	8x11	75	10x12	83
	6x11	55					10x12	78	10x15	90
22	5x11	75	5x11	75	6.3x11	98	10x15	105	10x20	135
			6.3x11	85	8x11	105				
33	5x11	90	6.3x11	105	8x11	145	10x20	170	13x21	180
	6.3x11	95	8x11	115	10x12	155				
47	6.3x11	120	6.3x11	145	10x12	170	13x21	210	13x21	220
			8x11	155	10x15	180			13x26	230
68	8x11	155	8x11	185	10x15	240	13x26	280	16x26	300
					10x17	250				
100	8x11	200	8x11	220	10x16	250	13x26	320	16x26	360
			10x12	240	10x20	270	16x26	330		
220	8x16	355			13x26	530	16x36	580	18x36	590
	10x12	350	10x17	400	16x26	560				
	10x15	360	10x20	430						
	10x17	365								
330	10x15	435	10x20	500			18x31	710	18x31	590
	10x17	450	13x21	570	16x26	680			18x36	740
	10x20	470								
470	10x20	590	13x21	640	16x26	840	18x36	870	22x42	890
	13x21	610	13x26	700	16x31	860	18x41	880		
			16x26	720						
560	13x21	660	13x26	770	16x36	880	-	-	-	-
680	13x21	730								
	13x26	770	16x26	880	16x36	920	-	-	-	-
820	13x26	850	16x26	920	18x31	970	-	-	-	-
1000	13x26	900	16x26	1150						
	16x21	950	16x36	1220	18x41	1250	-	-	-	-
	16x26	1010								
1500	16x31	1300	18x31	1350	22x42	1500	-	-	-	-
2200	16x26	1400	18x36	1590						
	16x31	1450	22x42	2100	25x44	1880	-	-	-	-
	18x36	1550								
2700	18x36	1610	22x42	1720	-	-	-	-	-	-
3300	18x36	1780	22x42	1900	-	-	-	-	-	-
4700	22x42	2050	25x44	2200	-	-	-	-	-	-
5600	25x42	2160	-	-	-	-	-	-	-	-
6800	25x44	2280	-	-	-	-	-	-	-	-
1000	25x42	2800	-	-	-	-	-	-	-	-
	25x50	3100	-	-	-	-	-	-	-	-

Ripple Current(mA,rms)at105°C120Hz

Ø D x L (mm)

WV uF	250		350		400		450	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.47	5x11	12	6.3x11	15	6.3x11	15	6.3x11	15
1	6.3x11	17	6.3x11	20	6x11 8x11	20 22	8x11	22
2.2	6x11 8x11	35 36	10x12	39	8x11 10x12	35 39	10x12 10x17	39 50
3.3	8x11	43	10x12	53	10x12 10x15	53 55	10x15 10x20	53 55
4.7	8x11 10x12	48 51	10x12 10x15	63 66	8x11 8x14 10x12 10x15 10x17 10x20	60 63 63 69 70 72	10x20	64
6.8	10x12	70	10x15	79	10x15	85	10x20	75
10	10x15	90	10x20	110	10x12 10x15 10x17 10x20 13x21	98 100 110 112 115	13x21 13x26 16x16	92 98 98
22	10x12 10x20	115 160	13x26	180	13x21 13x26 16x26	170 190	16x26 16x31	175 180
33	13x21 13x26	175 180	16x26	190	13x26 16x16 16x21 16x26	200 200 210 220	16x36	210
47	13x26 16x26	240 260	16x31	250	16x26 16x31 16x36 18x21	280 300 350 270	16x26 16x36	250 280
68	16x26	320	16x31	330	16x31 16x36 18x26	340 355 350	18x31 18x36	320 330
100	16x31	400	18x36	420	18x31 18x36	435 450	18x36 22x30	430 500

Ripple Current(mA,rms)at105 °C120Hz